Working Safely with Video Display Terminals

U.S. Department of Labor
Occupational Safety and Health Administration
1991 (Revised)

OSHA 3092

READEX FICHE best copy available

Material contained in this publication is in the public domain and may be reproduced, fully or partially, without permission of the Federal Government. Source credit is requested but not required.

The information contained in this publication is not considered a substitute for any provisions of the standard.

Working Safely with Video Display Terminals

U.S. Department of Labor
Lynn Martin, Secretary

Occupational Safety and Health Administration
Gerard F. Scannell, Assistant Secretary
1991 (Revised)

OSHA 3092

CONTENTS

Introduction	1
VDT Components	1
Health Effects	2
Eyestrain	2
Fatigue and Musculoskeletal Problems	2
Radiation	4
Interventions	5
Lighting	5
Work Station Compatibility and Design	7
VDT Design	8
OSHA Programs and Services	10
State Programs	10
Consultation Services	10
Safety and Health Program Management Guidelines	11
References	12

INTRODUCTION

The applications of computer technology and the accompanying use of VDTs are revolutionizing the workplaces of America, and their use will continue to grow in the future.

For example, according to some reports, there were only 675,000 VDTs in use in U.S. offices in 1976; in 1986, there were an estimated 28 million. The number of VDTs in use is growing rapidly, and in the 1990's, there may be anywhere from 40 to 80 million VDTs in the workplace [1, 2].

Along with this expanding use of VDTs have come reports about adverse health effects for VDT operators. In an effort to inform employers and employees, this booklet briefly examines the potential hazards and interventions employers can use to prevent or reduce the potential harmful effects of working with VDTs.

VDT Components

VDTs, comprised of a display screen, a keyboard, and a central processing unit, have rapidly replaced the use of typewriters and other office machines.

The display screen is the output device that shows what the computer is processing. Display screens can be monochrome (green, white, or orange on a black background), or color. An enhanced color screen can provide 16 colors out of a possible 64 at any one time.

The keyboard is the input device that allows the user to send information to the "brains" of the computer. Keyboards are commonly used for data entry and inquiry. The keyboard is similar to a standard typewriter keyboard but with additional special keys and functions.

The central processing unit is referred to as the "brains" of the computer. It is the center of operation for all the computer processing and performs calculations and organizes the flow of information into and out of the system.

The VDT operates at high voltages, but the power supplies generating these voltages produce very little current. All data processing equipment, including VDTs, must meet stringent international safety standards in this regard.

HEALTH EFFECTS

In the wake of the expanding use of VDTs, concerns have been expressed about their potential health effects. Complaints include excessive fatigue, eye strain and irritation, blurred vision, headaches, stress, and neck, back, arm, and muscle pain. Other concerns include general physical discomfort, cumulative trauma disorders, and potential exposure to electromagnetic fields. Research has shown that these symptoms can result from problems with the equipment, work stations, office environment or job design, or from a combination of these. Some of the most common stressors, their related health effects, and their means of prevention are discussed briefly in the following sections.

Eyestrain

Visual problems such as eyestrain and irritation are among the most frequently reported complaints by VDT operators. These visual symptoms can result from improper lighting, glare from the screen, poor positioning of the screen itself, or copy material that is difficult to read. These problems usually can be corrected by adjusting the physical and environmental setting where the VDT users work. For example, work stations and lighting can and should be arranged to avoid direct and reflected glare anywhere in the field of sight, from the display screen, or surrounding surfaces.

VDT operators also can reduce eyestrain by taking vision breaks, which may include exercises to relax eye muscles after each hour or so of operating a VDT.* Changing focus is another way to give eye muscles a chance to relax. The employee needs only to glance across the room or out the window from time to time and look at an object at least 20 feet away. Other eye exercises may include rolling or blinking the eyes, or closing them tightly for a few seconds.

Fatigue and Musculoskeletal Problems

Work performed at VDTs may require sitting still for considerable time and usually involves small frequent movements of the eyes, head, arms, and fingers. Retaining a fixed posture over long periods of time requires a significant static holding force, which causes fatigue.

---

* The National Institute for Occupational Safety and Health (NIOSH) recommends a 15-minute rest break after 2 hours of continuous VDT work for operators under moderate visual demands; and a 15-minute rest break after 1 hour of continuous VDT work where there is a high visual demand or repetitive work tasks.

Proper work station design is very important in eliminating these types of problems. Some variables of work station design include the VDT table, chair, and document holder. An individual work station should provide the operator with a comfortable sitting position sufficiently flexible to reach, use, and observe the display screen, keyboard, and document. Some general considerations to minimize fatigue include posture support (back, arms, legs, and feet), and adjustable display screens and keyboards. VDT tables or desks should be vertically adjustable to allow for operator adjustment of the screen and keyboard. Proper chair height and support to the lower region of the back are critical factors in reducing fatigue and related musculoskeletal complaints. Document holders also allow the operator to position and view material without straining the eyes, or neck, shoulder, and back muscles.

The type of task performed at the VDT may also influence the development of fatigue. In designing a work station, the type of tasks involved should be considered when determining the placement of the display screen and keyboard.

VDT operators also are subject to a potential risk of developing various musculoskeletal and nerve disorders such as cumulative trauma, or repetitive motion, disorders. Carpal tunnel syndrome (CTS) is one commonly recognized cumulative trauma disorder among VDT operators. CTS is caused by repetitive wrist-hand movement and exertion. CTS is the compression and entrapment of the median nerve where it passes through the wrist into the hand—in the carpal tunnel (see Figures 1 and 2).



Figure 1

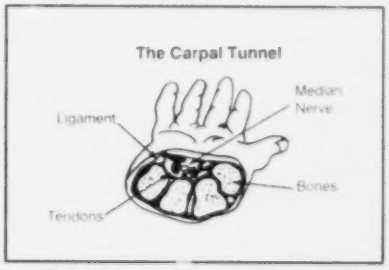

Figure 2

When irritated, the tendons and their sheaths housed inside the narrow carpal tunnel swell and press against the nearby median nerve. The pressure causes tingling, numbness, or severe pain in the wrist and hand.

CTS usually can be reduced by stopping or limiting the activity that aggravates the tendons and median nerve (e.g., data/keyboard entry), by main-taining proper posture, or as a last resort, by having surgery. For correct posture, VDT operators should sit in an upright position at the keyboard, with arms parallel to the floor. The wrists and forearms also may require support, depending on the tasks involved.

Radiation

Another issue of concern for the VDT operator is whether the emission of radiation, such as X-ray or electromagnetic fields in the radio-frequency and extreme low frequency ranges, poses a health risk. Some workers, including pregnant women, are concerned that their health could be affected by electromagnetic fields emitted from VDTs. The threat from X-ray exposures is largely discounted because of the very low emission levels. The radiofrequency and extreme low frequency electromagnetic fields are still at issue despite the low emission levels. To date, however, there is no conclusive evidence that the low levels of radiation emitted from VDTs pose a health risk to VDT operators. Some workplace designs, however, have incorporated changes—such as increasing the distance between the operator and the terminal and between work stations—to reduce potential exposures to electromagnetic fields.

Since the possible effects of radiation from VDTs continue to concern operators, the issue is still being researched and studied. OSHA has asked the Committee on Interagency Radiation Research and Policy Coordination to nominate a panel to read and evaluate all the literature on the subject and to determine whether there is sufficient data upon which to establish a dose-response relationship or develop an assessment of the significance of risk for workers exposed to electromagnetic fields at wave lengths relevant to VDTs. NIOSH has a resource booklet entitled, "NIOSH Publications on Video Display Terminals" and continues to study the question of VDT operator risk from exposure to electromagnetic fields.

INTERVENTIONS

There are a variety of interventions that employers can implement to reduce or prevent harmful effects associated with VDT use. Some of these are briefly identified in the following paragraphs.

Lighting

Light should be directed so that it does not shine into the operator's eyes when the operator is looking at the screen. Further, lighting should be adequate for the operator to see the text and the screen, but not so bright as to cause glare or discomfort (see Figure 3).

There are four basic lighting factors that must be controlled to provide suitable office illumination and avoid eyestrain: quantity, contrast, and direct and reflected glare.

Quantity. In most offices, light fixtures and daylight provide illumination for work surfaces (e.g., 50-100 foot-candles). High illumination "washes out" images on the display screen; therefore, if possible, where VDTs are used, illumination levels should be somewhat lower (i.e., 28-50 foot-candles are often satisfactory).

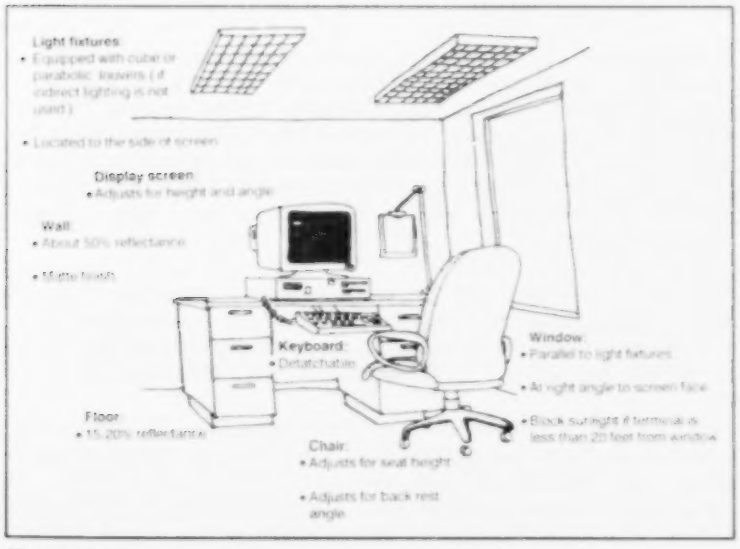
Light fixtures:
• Equipped with cube or parabolic louvers (if indirect lighting is not used)
• Located to the side of screen
Display screen:
• Adjusts for height and angle
Wall:
• About 50% reflectance
• Matte finish
Keyboard:
• Detachable
Window:
• Parallel to light fixtures
• At right angle to screen face
• Block sunlight if terminal is less than 20 feet from window
Floor:
• 15-20% reflectance
Chair:
• Adjusts for seat height
• Adjusts for back rest angle

Figure 3

Contrast. Contrast is the difference in luminance or brightness between two areas. To prevent the visual load caused by alternate light and dark areas, the difference in illuminance between the VDT display screen, horizontal work surface, and surrounding areas should be minimized.

Most of the tasks associated with VDTs do not require precise visual acuity, and diffuse (indirect) lighting is appropriate. The advantages of diffuse lighting are twofold: there tend to be fewer hot spots, or glare sources, in the visual field; and the contrasts created by the shape of objects tend to be "softer." The result, in terms of luminous intensities, is a more uniform visual field. Where indirect lighting is not used, parabolic louvers on overhead lights are probably the next best way to ensure that light is diffused.

Glare. Glare is usually defined as a harsh, uncomfortably bright, light. Glare is dependent upon the intensity, size, angle of incidence, luminance, and proximity of the source to the line of sight. Glare may be the result of direct light sources in the visual field (e.g., windows), or reflected light from polished surfaces (e.g., keyboards,) or from more diffuse reflections which may reduce contrast (e.g, improper task lighting). Glare may cause annoyance, discomfort, or loss in visual performance and visibility.

In many cases, the reorientation of work stations may be all that is necessary to move sources of glare out of the line of sight. The proper "treatment" for window glare includes baffles, venetian blinds, draperies, shades, or filters. The face of the display screen should be at right angles to windows and light sources. Care should be taken, particularly when terminals are installed within 20 feet of windows, to ensure that there is some method of blocking the sun's light, such as blinds or curtains.

To limit reflection from walls and work surfaces visible around the screen, these areas should be painted a medium color and have a nonreflective finish. Work stations and lighting should be arranged to avoid reflected glare on the display screen or surrounding surfaces.

Antiglare filters that attach directly to the surface of a VDT screen can help reduce glare. Two types of filters are available: natural density filters, which scatter and diffuse some of the light reflected off the glass display screen, and micromesh filters, which not only scatter the light but also absorb most of the light reflected from the surface of the screen by means of an imbedded interwoven grid of dyed nylon fibers.

Newer model keyboards tend to have antiglare matte finishes. Further, lighting should be adequate to enable the operator to see the text and the screen, but not so bright as to cause glare. Where used, work station lighting should be easily adjustable and directed at source documents and not at the display screen surface.

Work Station Compatibility and Design

In the office environment, the work station consists primarily of a work surface of some type, a chair, VDT equipment, and other related items (See Figure 4).

The employee must have adequate work space to perform each of the tasks required by the job. Individual body size must be considered and will influence the design of the chair, the height of the work surface, and access to various elements of the work station, including the display screen.

A height-adjustable work surface is an advantage. In general, a good VDT work surface will provide as many adjustable features as

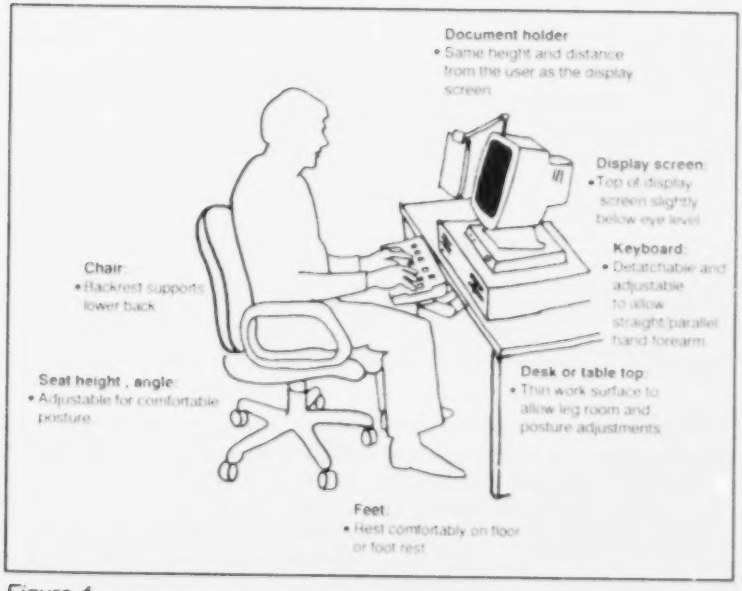
Document holder
• Same height and distance from the user as the display screen
Display screen:
• Top of display screen slightly below eye level
Keyboard:
• Detatchable and adjustable to allow straight parallel hand forearm
Chair:
• Backrest supports lower back
Seat height , angle:
• Adjustable for comfortable posture
Desk or table top:
• Thin work surface to allow leg room and posture adjustments
Feet:
• Rest comfortably on floor or foot rest

Figure 4

possible. Also, adequate legroom should be provided for the employee to stretch out and relieve some of the static load that results from sitting with the legs in a fixed position for long periods.

Chairs. The chair can be a crucial factor in preventing adverse health effects as well as in improving employee performance in office work. As the majority of office workers spend most of their time sitting, proper back and shoulder support helps to reduce fatigue. If the chair does not fit the worker properly, there can be serious physical effects, as well as effects on performance. Consequently, the appropriate types of ergonomic chairs should be made available to accommodate various worker needs.

Chair Height. When an employee must spend from 6 to 8 hours in the chair, the height of the chair and the work surface are critical. The human body dimension that provides a starting point for determining correct chair height is the "popliteal" height. This is height from the floor to the point at the crease behind the knee. The chair height is correct when the entire sole of the foot can rest on the floor or footrest and the back of the knee is slightly higher than the seat of the chair. This allows the blood to circulate freely in the legs and feet.

Seatpan Design. Size and shape are two factors to consider in the design of the seatpan of the chair. The seatpan can be slightly concave with a rounded, or "waterfall," edge. This will help distribute the weight and may also prevent sliding forward in the chair. The angle of the seatpan should also be considered. Some options include a seatpan that slopes slightly down at the back or one that has a forward tilt that produces less stress on the lower region.

Backrest. A proper backrest should support the entire back including the lower region. The seat and backrest of the chair should support a comfortable posture that permits frequent variations in the sitting position. The backrest angle and chair height should be easily adjustable. A foot rest may be necessary for shorter individuals.

VDT Design

Display Screen. Most new VDTs have separate, adjustable keyboards and display screens that allow both the keyboard and display screen to be positioned appropriately for the employee. This is important because VDT operators may spend a considerable amount of time looking at the display. The height of the display screen surface must be determined in relation to the task and the operator's height.

In addition, screens that swivel horizontally and tilt or elevate vertically enable the operator to select the optimum viewing angle.

The topmost line of the display should not be higher than the user's eyes. The screen and document holder should be the same distance from the eye (to avoid constant changes in focus) and close enough together so the operator can look from one to the other without excessive movement of the neck or back. The incline of the document holder should be adjustable.

The preferred viewing distance for VDTs ranges between 18 and 24 inches. To this distance must be added the depth of the display itself. Some displays are as much as 20 inches deep. The best way to deal with this, other than increasing table depth, is to install a keyboard extension on the front of the desk.

Legibility is also a primary consideration in selecting a display screen. Legibility factors to be considered include symbol size and design, contrast, and sharpness.

Keyboard. The keyboard should be detachable and adjustable to ensure proper position, angle, and comfort for the operator. A lower than normal work surface may be required to keep the operator's arms in a comfortable position. The thickness and the slope of the keyboard are critical in determining the preferred height. The keyboard and table, therefore, have to be selected in relation to each other, or the surface must be adjustable. Options for keyboard placement also should be considered in choosing the size and adjustability of the work surface.

The preferred working position for most keyboard operators is with the forearms parallel to the floor and elbows at the sides, which allows the hands to move easily over the keyboard. The wrist should be in line with the forearm. A padded and detachable wrist rest for the keyboard can help keep the operator's wrists and hands in a straight position while key stroking.

Operating a VDT, like any form of sustained physical or mental work, will lead eventually to fatigue. It may take the form of visual fatigue, muscular fatigue, general body fatigue, or mental and psychological fatigue. Rest pauses to alleviate or delay the onset of fatigue may be necessary. The frequency and duration should be determined by the employer and should depend on the task involved, the pattern of work, and the individual VDT operator concerned.

OSHA PROGRAMS AND SERVICES

State Programs

The Occupational Safety and Health Act of 1970 encourages States to develop and operate their own job safety and health plans. OSHA approves and monitors these plans. There are currently 25 State plan States: 23 States administer plans covering both private and public (State and local government) employment, 2 States, Connecticut and New York, cover the public sector only.

The 25 States and territories with their own OSHA-approved occupational safety and health plans must adopt standards identical to, or at least as effective as, the Federal standards. Until a State standard is promulgated, OSHA will provide interim enforcement assistance, as appropriate, in these States.

A listing of State plan designees appears at the end of this booklet.

Consultation Services

Employers who want help in recognizing and correcting safety and health hazards and in improving their safety and health programs can receive assistance from a free consultation service largely funded by OSHA. The service is delivered by State government agencies or universities employing professional staff and consultants.

The consultation service offers advice and help in correcting problems and in maintaining continued effective protection. In addition to helping employers identify and correct specific hazards, consultants provide guidance in establishing or improving an effective safety and health program and offer training and education for the company, the supervisors, and the employees. Such consultation is a cooperative approach to solving safety and health problems in the workplace. As a voluntary activity, it is neither automatic nor expected. It must be requested. This program is completely separate from OSHA inspection efforts. No citations are issued or penalties proposed for any safety and health problems found in the workplace. The service is confidential.

Safety and Health Program Management Guidelines

Effective management of worker safety and health protection is a decisive factor in reducing the extent and severity of work-related injuries and illnesses and their related costs. To assist employers and employees in developing effective safety and health programs, OSHA published recommended **Safety and Health Program Management Guidelines** (January 26, 1989, 54 **FR**: 3908-3916). These voluntary guidelines apply to all places of employment covered by OSHA.

The guidelines identify four general elements that are critical to the development of a successful safety and health management program:

- management commitment and employee involvement;
- worksite analysis;
- hazard prevention and control; and
- safety and health training.

The guidelines recommend specific actions, under each of these general elements, to achieve an effective safety and health program.

For further information on OSHA programs, contact your nearest OSHA office, state program, or consultation project listed at the end of this publication.

For further information on VDTs, please consult the following sources:

Occupational Safety and Health Administration (OSHA)
U.S. Department of Labor
Technical Data Center, Room N2439
200 Constitution Avenue, N.W.
Washington, D.C. 20210

U.S. Department of Health and Human Services
Public Health Service
Center for Disease Control
National Institute for Occupational Safety and Health (NIOSH)
Robert A. Taft Laboratories
4676 Columbia Parkway
Cincinnati, OH 45226-1998

REFERENCES

1. Elayne Clift. "Personal Computers—User Friendly?" *Gov Exe* 21 (8):38-40, August 1989.

2. John E. Peterson. "RMI: The Hazard of the '90s." Science/Health Section. *Marin IndepJ*:F6, July 30, 1989.

Selected Bibliography

American National Standards Institute. *American National Standard for Human Factors Engineering of Visual Display Terminal Workstations.* Santa Monica, CA: Human Factors Society, Inc., 1988. 90 Pp.

Communications Workers of America, AFL-CIO. *Visual Display Terminal Manual.* Washington, DC, 1982. Unpublished. Pp. 14-15.

The Newspaper Guild and International Typographical Union (AFL-CIO, CLC). "Getting the Right VDT." In: *Humanizing the VDT Workplace: A Health Manual for Local Officers and Stewards.* Washington, D.C., November 1981. Pp. 7-13.

University of California Labor Occupational Health Program. " Musculoskeletal Problems and Ergonomics." *Fact Sheet on VDTs.* Berkeley, California. 2 Pp.

William E. Murray. "Video Display Terminals." National Institute for Occupational Safety and Health. Division of Biomedical and Behavioral Science. *Institute of Electrical and Electronic Engineers. Computer Graphic and Application.* Cincinnati, 1984. Pp. 41-44.

United Automobile, Aerospace and Agriculture Implement Workers of American. *Guide to Visual Display Units.* Reprinted, January 1983.

Related Publications

Academy of Ophthalmology. *Video Display Terminals and the Eye*. 1988.

Arndt, R. "Working Posture and Musculoskeletal Problems of Video Display Terminal Operators: Review and Reappraisal." *AIHAJ* 44: 437-446, 1983.

Grandjean, Etienne. *Ergonomics in Computerized Offices*. New York: Taylor & Francis, 1987. 227 Pp.

Murray, W.E.; Mass, C.E.; Parr, W.H.; and Cox, C. "A Radiation and Industrial Hygiene Survey of Video Display Terminal Operations." *Human Factors* 23:413-420, 1981.

U.S. Department of Health and Human Services. National Institute for Occupational Safety and Health. *Potential Health Hazards of Video Display Terminals*. NIOSH Research Report DHHS (NIOSH) Publication No. 81-129. Washington, D.C.: U. S. Government Printing Office, 1981.

_____. *NIOSH Publications on Video Display Terminals*. Springfield, VA: NTIS, July 1988. 28 Pp.

"VDTs: The Seat of the Problem." *Safety and Health Magazine*:51-55, November 1988.

STATES WITH APPROVED PLANS

COMMISSIONER
Alaska Department of Labor
P.O. Box 21149
Juneau, AK 99802-1149
(907) 465-2700

DIRECTOR
Industrial Commission of Arizona
800 W. Washington
Phoenix, AZ 85007
(602) 542-5795

DIRECTOR
California Department of Industrial Relations
395 Oyster Point Boulevard
3rd Floor, Wing C
San Francisco, CA 94080
(415) 737-2960

COMMISSIONER
Connecticut Department of Labor
200 Folly Brook Boulevard
Wethersfield, CT 06109
(203) 566-5123

DIRECTOR
Hawaii Department of Labor and Industrial Relations
830 Punchbowl Street
Honolulu, HI 96813
(808) 548-3150

COMMISSIONER
Indiana Department of Labor
1013 State Office Building
100 North Senate Avenue
Indianapolis, IN 46204-2287
(317) 232-2655

COMMISSIONER
Iowa Division of Labor Services
1000 E. Grand Avenue
Des Moines, IA 50319
(515) 281-3447

SECRETARY
Kentucky Labor Cabinet
U.S. Highway 127 South
Frankfort, KY 40601
(502) 564-3070

COMMISSIONER
Maryland Division of Labor and Industry
Department of Licensing and Regulation
501 St. Paul Place, 4th Floor
Baltimore, MD 21202-2272
(301) 333-4179

DIRECTOR
Michigan Department of Labor
309 N. Washington
P.O. Box 30015
Lansing, MI 48909
(517) 373-9600

ACTING DIRECTOR
Michigan Department of Public Health
3423 North Logan Street
Box 30195
Lansing, MI 48909
(517) 335-8022

COMMISSIONER
Minnesota Department of Labor and Industry
443 Lafayette Road
St. Paul, MN 55101
(612) 296-2342

ADMINISTRATOR
Nevada Department of Industrial Relations
Division of Occupational Safety and Health
Capitol Complex
1370 S. Curry Street
Carson City, NV 89710
(702) 885-5240

DIRECTOR
New Mexico Environmental Improvement Division
Health and Environment Department
1190 - St. Francis Drive - S4100
Santa Fe, NM 87503-0968
(505) 827-2850

COMMISSIONER
New York Department of Labor
One Main Street
Brooklyn, NY 11201
(518) 457-3518

COMMISSIONER
North Carolina Department of Labor
4 West Edenton Street
Raleigh, NC 27603
(919) 733-7166

ADMINISTRATOR
Oregon Occupational Safety and Health Division
Oregon Department of Insurance and Finance
21 Labor and Industries Building
Salem, OR 97310
(503) 378-3304

SECRETARY
Puerto Rico Department of Labor and Human Resources
Prudencio Rivera Martinez Building
505 Munoz Rivera Avenue
Hato Rey, PR 00918
(809) 754-2119-22

COMMISSIONER
South Carolina Department of Labor
3600 Forest Drive
P.O. Box 11329
Columbia, SC 29211-1329
(803) 734-9594

COMMISSIONER
Tennessee Department of Labor
501 Union Building
Suite "A" - 2nd Floor
Nashville, TN 37219
(615) 741-2582

ADMINISTRATOR
Utah Occupational Safety and Health
160 East 300 South
P.O. Box 5800
Salt Lake City, UT 84110-5800
(801) 530-6900

COMMISSIONER
Vermont Department of Labor and Industry
120 State Street
Montpelier, VT 05602
(802) 828-2765

COMMISSIONER
Virgin Islands Department of Labor
Box 890
Christiansted
St. Croix, VI 00820
(809) 773-1994

COMMISSIONER
Virginia Department of Labor and Industry
P.O. Box 12064
Richmond, VA 23241-0064
(804) 786-2376

DIRECTOR
Washington Department of Labor and Industries
General Administration Building
Room 334 - AX-31
Olympia, WA 98504-0631
(206) 753-6307

ASSISTANT ADMINISTRATOR
Wyoming Occupational Health and Safety
Herschler Building, 2nd Floor East
Cheyenne, WY 82002
(307) 777-7786 or 777-7787

CONSULTATION PROJECTS

For more information on consultation programs, contact the appropriate office in your state listed below.

State	Telephone
Alabama	(205) 348-3033
Alaska	(907) 264-2599
Arizona	(602) 255-5795
Arkansas	(501) 682-4522
California	(415) 557-2870
Colorado	(303) 491-6151
Connecticut	(203) 566-4550
Delaware	(302) 571-3908
District of Columbia	(202) 576-6339
Florida	(904) 488-3044
Georgia	(404) 894-8274
Guam	9-011 (671) 646-9246
Hawaii	(808) 548-7510
Idaho	(208) 385-3283
Illinois	(312) 917-2339
Indiana	(317) 232-2688
Iowa	(515) 281-5352
Kansas	(913) 296-4386
Kentucky	(502) 564-6895
Louisiana	(504) 342-9601
Maine	(207) 289-6460
Massachusetts	(617) 727-3463
Michigan	(517) 335-8250 (H) (517) 322-1814 (S)
Minnesota	(612) 297-2393
Mississippi	(601) 987-3981
Missouri	(314) 751-3403
Montana	(406) 444-6401
Nebraska	(402) 471-4717
Nevada	(702) 789-0546
New Hampshire	(603) 271-3170
New Jersey	(609) 984-3507
New Mexico	(505) 827-2885
New York	(518) 457-5468
North Carolina	(919) 733-3949
North Dakota	(701) 224-2348
Ohio	(614) 644-2631
Oklahoma	(405) 528-1500
Oregon	(503) 378-3272
Pennsylvania (Toll-free in State)	(800) 382-1241 (412) 357-2561

Puerto Rico	(809) 754-2134-2171
Rhode Island	(401) 277-2438
South Carolina	(803) 734-9599
South Dakota	(605) 688-4101
Tennessee	(615) 741-7036
Texas	(512) 458-7254
Utah	(901) 530-6868
Vermont	(802) 828-2765
Virginia	(804) 367-1986
Virgin Islands	(809) 772-1315
Washington	(206) 586-0961
West Virginia	(304) 348-7890
Wisconsin	(608) 266-8579 (H)
	(414) 521-5063 (S)
Wyoming	(307) 777-7786

H - Health
S - Safety

*U.S. GOVERNMENT PRINTING OFFICE : 1991 814/45325

U.S. Department of Labor
Occupational Safety and Health Administration
Regional Offices

REGION I
(CT,* MA, ME, NH, RI, VT*)
133 Portland Street
1st Floor
Boston, MA 02114
Telephone: (617) 565-7164

REGION II
(NJ, NY,* PR,* VI*)
201 Varick Street
Room 670
New York, NY 10014
Telephone: (212) 337-2378

REGION III
(DC, DE, MD,* PA, VA,* WV)
Gateway Building, Suite 2100
3535 Market Street
Philadelphia, PA 19104
Telephone: (215) 596-1201

REGION IV
(AL, FL, GA, KY,* MS, NC,* SC,* TN*)
1375 Peachtree Street, N.E.
Suite 587
Atlanta, GA 30367
Telephone: (404) 347-3573

REGION V
(IL, IN,* MI,* MN,* OH, WI)
230 South Dearborn Street
Room 3244
Chicago, IL 60604
Telephone: (312) 353-2220

REGION VI
(AR, LA, NM,* OK,TX)
525 Griffin Street
Room 602
Dallas, TX 75202
Telephone: (214) 767-4731

REGION VII
(IA,* KS, MO, NE)
911 Walnut Street
Room 406
Kansas City, MO 64106
Telephone: (816) 426-5861

REGION VIII
(CO, MT, ND, SD, UT,* WY*)
Federal Building, Room 1576
1961 Stout Street
Denver, CO 80294
Telephone: (303) 844-3061

REGION IX
(American Samoa, AZ,* CA,* Guam, HI,* NV,* Trust Territories of the Pacific)
71 Stevenson Street
Room 415
San Francisco, CA 94105
Telephone: (415) 744-6670

REGION X
(AK,* ID, OR,* WA*)
1111 Third Avenue, Suite 715
Seattle, WA 98101 - 3212
Telephone: (206) 442-5930

*These states and territories operate their own OSHA-approved job safety and health plans (Connecticut and New York plans cover public employees only). States with approved plans must have a standard that is identical to, or at least as effective as, the federal standard.